


Freeze Flow Sanitary Yard Hydrant Specs

Standard ADA Model 213XADA (x=bury depth)

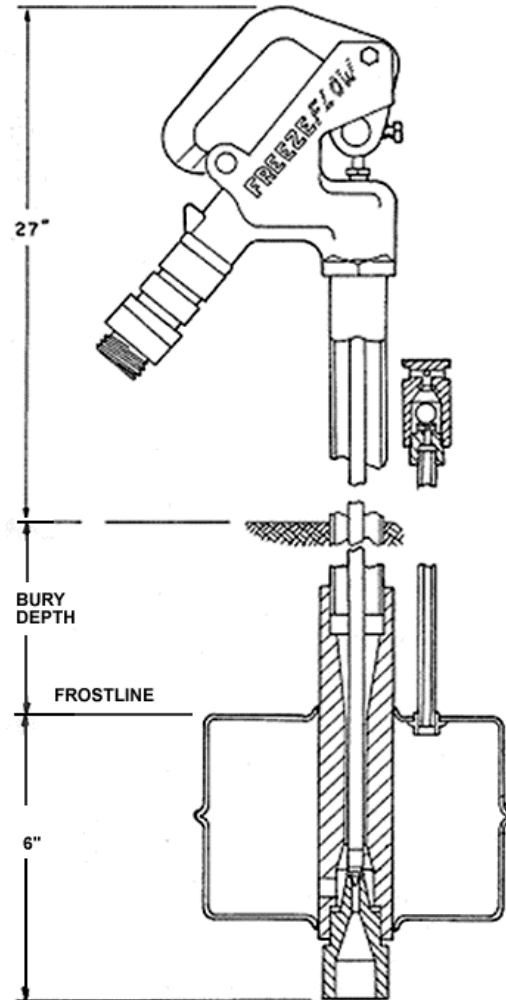

Sanitary Yard Hydrant shall be the Freezeflow Standard ADA/ Lever Model # 213XADA (X represents bury depth, i.e. 2134ADA – 4’ bury) manufactured by Hoeptner Perfected Products, Gilroy, CA

Yard hydrants shall be certified to ASSE 1057 Sanitary Yard Hydrant Standard and shall drain into a stainless steel canister located below the frost line.

Yard hydrant shall meet the ADA requirement of operating at less than 5 lbs of force

Yard hydrant shall be supplied with a 1011 backflow preventer, heavy cast iron head with lever and pail hook. Hydrant shall be lockable. The inlet of the hydrant shall be $\frac{3}{4}$ FIP and the outlet shall be $\frac{3}{4}$ hose thread. It shall have a 1” schedule 40 galvanized riser and a solid brass operating rod that seals on an easily replaceable o-ring. All moving parts are to be replaceable from the surface without the need to excavate the hydrant.

Yard hydrant shall operate at a minimum operating pressure of 20 psi and a max of 100 psi

Hoeptner Perfected Products * 7796 Oak Spring Circle * Gilroy, CA 95020
408-847-7615 * Fax (408) 847-0675 * work@garlic.com * www.freezeflow.com